



PALLET JACKS



5500 lb. Capacity Standard Hand Pallet Jack



- Powder coated hydraulic pump, robust and durable, with fine control of lowering speed and overload bypass valve.



- Polyurethane wheels: great for delicate floors with hard wearing and non-marking properties, quiet and durable.



- Three position operational handle lever for lifting, transporting and lowering purposes.



- Professional and ideal storage aid for all variety of manual transport tasks over short distances in stores and warehouses as well as factory plants.
- Compact and attractive design with maximum loading capacity of 5500 lbs.
- High quality steel and German standard WAGNER painting system ensures best powder coating and paint quality.
- All pivot points are greased, ensuring excellent maneuverability with effortless steering. The chromed bearing bushes and joints ensuring quiet running properties and long service life.



Hand Pallet Jack Specifications


Capacity	5500 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	7 x 2 inch Polyurathane Coated
Load Roller Single	3 x 3.7 inch Polyurathane Coated

Model

Fork Size

PJ5500-2736	W27 x L36 inch
PJ5500-2742	W27 x L42 inch
PJ5500-2748	W27 x L48 inch
PJ5500-2132	W20.5 x L32 inch
PJ5500-2136	W20.5 x L36 inch
PJ5500-2142	W20.5 x L42 inch
PJ5500-2148	W20.5 x L48 inch
PJ5500-1836	W18 x L36 inch
PJ5500-1848	W18 x L48 inch


Wheels

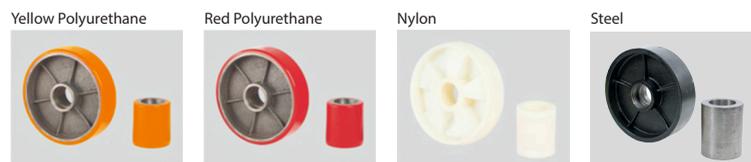

Wheel Type	Load Wheel	Fork Wheel
Yellow Polyurethane	PJ-LW-PUY	PJ-FW-PUY
Red Polyurethane	PJ-LW-PU	PJ-FW-PU
Nylon	PJ-LW-NYLON	PJ-FW-NYLON
Steel	PJ-LW-STEEL	PJ-FW-STEEL

Model PJ5500-2748-AC 5500 lb. Capacity Premium Hand Pallet Jack

- Top class range of pallet trucks.
- Professional and ideal storage aid for all variety of manual transport tasks over short distances in stores and warehouses as well as factory plants.
- Reliable, sturdy, torsion-resistant due to it's extremely strong high quality steel profile Germany standard WAGNER painting system ensures best powder coating and painting quality.
- All pivot points are greased, ensuring excellent maneuverability with effortless steering. The chromed bearing bushes and joints ensuring quiet running properties and long service life.




Galvanized whole casting hydraulic pump, robust and durable, with fine control of lowering speed and overload valve, low routine maintenance.



Hand Pallet Jack Specifications

Capacity	5500 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	7 x 2 inch Polyurathane Coated
Load Roller Single	3 x 3.7 inch Polyurathane Coated

4400 lb. Extra Long Pallet Jack

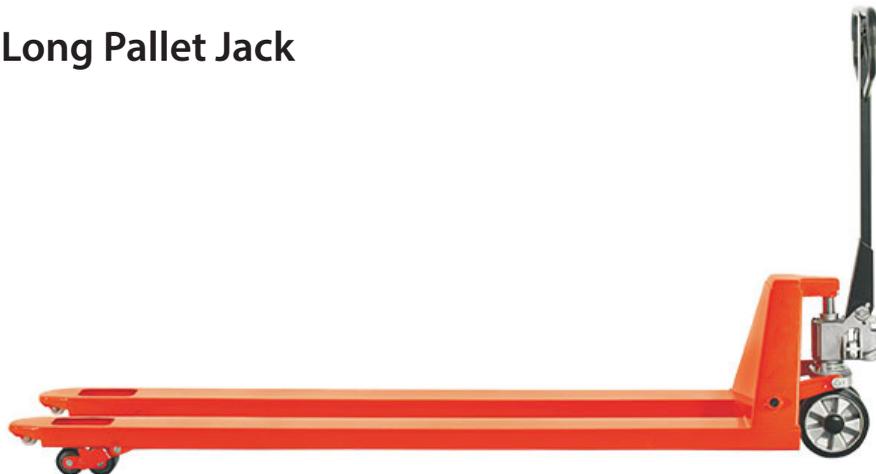

Extra Long Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	2.9 inch
Max Fork Height	7.5 inch
Steering Wheel	7.1 x 2 inch
Load Roller Single	2.9 x 3.7 inch
Load Roller Tandem	2.9 x 2.7 inch
Size of Forks	6.3 x 3 inch

- Diverse fork sizes
- Super long hand pallet truck designed for carrying goods with big volume
- 4400 lbs load capacity

Model Fork Size

PJ4400-2772	W27 x L72 inch
PJ4400-2779	W27 x L79 inch

Model PJ4400-2748-ACL 4400 lb. Low Profile Pallet Jack



Low Profile Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	2 inch
Max Fork Height	6.5 inch
Steering Wheel	7.1 x 2 inch
Load Roller Single	2 x 3.7 inch
Load Roller Tandem	2 x 3 inch
Size of Forks	6.3 x 1.5 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

- Easy access to pallets and containers that sit lowest to the floor, with minimum floor clearance of 35mm and 51mm.
- Your handy choice for handling the low pallets which usually can only be handled by counterbalanced forklifts.

Model PJ6600-2748-ACM 6600 lb. Pallet Jack

Pallet Jack Specifications

Capacity	6600 lbs
Min. Fork Height	3.3 inch
Max Fork Height	8 inch
Steering Wheel	8 x 2 inch
Load Roller Single	3.1 x 3.7 inch
Load Roller Tandem	3.1 x 2.7 inch
Size of Forks	6.3 x 2.3 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

- Professional and ideal storage aid for all variety of manual transport operations over short distances in stores and warehouses as well as factory plants.



- All pivot points are greased ensuring excellent maneuverability with effortless steering.
- The chromed bearing bushes and joints ensures quiet running properties and a particularly long service life.
- Ergonomically designed handle with comfortable rubber grip allows optimized safety as well as comfort.
- Three position operations handle for lifting, transporting and lowering purposes.



Model PJ4400-ACZ
4400 lb. Capacity Galvanized Hand Pallet Jack

- Ideal transport aid for applications in damp or harsh environments such as meat or fish processing plants, dairies, pharmaceutical and chemical industry.

Galvanized Pallet Jack Specifications	
Capacity	4400 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	8 x 2 inch
Load Roller Single	2.9 x 3.7 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

Conforms to EN 1757-2


- All of the exposed parts of the whole truck are galvanized, including hydraulic pump, fork frame, handle and so on.
- Special application in cold and wet environments resists the effects of cold, condensation and washing.
- Nylon steering wheel and fork rollers as standard option for damp or harsh environments.
- Pressure relief valve and overload valve to prevent pump damages when load exceeds weight limits.
- The one-piece pump design simplifies repairs, assuring reliable service and long life.

Model PJ4400-ACS
4400 lb. Capacity Stainless Steel Hand Pallet Jack

Stainless Steel Pallet Jack Specifications	
Capacity	4400 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	8 x 2 inch
Load Roller Single	2.9 x 3.7 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

Conforms to EN 1757-2

- All metal parts made completely of stainless steel, including hydraulic pump, fork frame, handle, and so on.
- Ideal transport aid for applications in damp or harsh environments such as meat or fish processing plants, dairies, pharmaceutical and chemical industries. Specifically designed for applications where hygiene is of utmost importance.

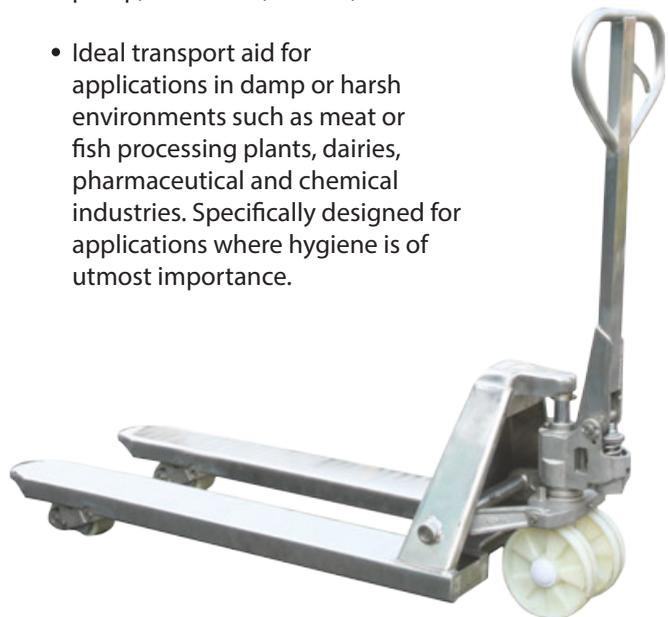

- With pressure relief valve and overload valve to prevent pump damages when load exceeds weight limits.
- The enclosed fork tips ensure there is no dead corner where corrosive spatters remains and damages the truck.

Model PJ4400-3348-4W Four-Way Pallet Jack




- Can access 4-way pallets from any direction
- 3-position hand control - Raise, lower, neutral
- 2 inch lowered and 6.5 inch raised height.
- Features the quality of our AC model standard hand pallet truck.

Four-Way Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	2 inch
Max Fork Height	6.5 inch
Steering Wheel	7 x 2 inch
Load Roller Single	2 x 3.7 inch
Load Roller Tandem	2.6 x 2.4 inch
Size of Forks	6.5 x 2 inch
Overall Fork Width	33 inch
Length of Forks	48 inch

Conforms to EN 1757-2

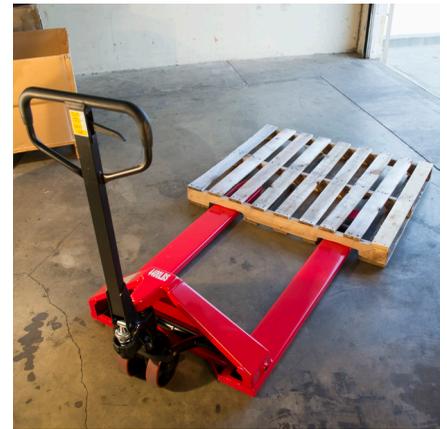

Fork Extensions



- Designed to be used when long objects or large pallets must be lifted and moved with a fork truck. It is required that extensions do not exceed length of forks on which they are installed by more than 50%.
- Welded steel construction. Fits onto forks up to 50mm thick. Steel retaining strap prevents forks extensions from sliding off forks during use. Powder coated yellow finish.

Fork Extensions

Model	PJ460-FE	PJ560-FE	PJ572-FE	PJ596-FE	PJ672-FE
Extended Length	60 inch	60 inch	72 inch	96 inch	72 inch
Min. Fork Length	40 inch	40 inch	48 inch	64 inch	48 inch
Fitting Fork Length	4 inch	5 inch	5 inch	5 inch	6 inch
Fork Width	5 inch	6 inch	6 inch	6 inch	7 inch

Model PJ3300-2743-HLT 3300 lb. Scissor Lift Pallet Jack

Scissor lift pallet trucks are designed to load and unload conveyor, feed presses, or any application requiring moving and positioning pallets or containers.

- Equipped with quick lift function doubles the lift speed for loads lighter than 400 lbs.
- With pressure relief valve and overload valve to prevent pump damages when load exceeds weight limits.
- The enclosed fork tips and reinforced fork frames ensures long service life.



Hand Scissor Lift Pallet Jack	
Capacity	3300 lbs
Min. Fork Height	3.3 inch
Max Fork Height	31.5 inch
Size of Forks	6.4 x 2.0 inch
Width of Overall Forks	27 inch
Length of Fork	43.3 inch
Net Weight	275 lbs.
Fork Roller	3.0 x 2.0 inch
Big Wheel	6.0 x 2.0

Lift Table



- Lifting, Lowering, Transporting
- Always the correct working height
- Steel construction with platform made from sheet steel.
- Chrome plated handle.
- Foot pedal operated hydraulic lifting.
- Optional screw type lowering and cable type lowering.
- Available in five different sizes and capacities

Lift Table					
Model	PJ330-TF15	PJ660-TF30	PJ1100-TF50	PJ1650-TF75	PJ2200-TF100
Capacity	330 lbs	660 lbs.	1100 lbs.	1650 lbs.	2200 lbs.
Min. Table Height	8.7 inch	11.2/13.4 inch	11.2/13.4 inch	16.5 inch	15 inch
Max Table Height	28.3 inch	34.6 inch	34.6 inch	39 inch	39 inch
Dimensions of Table	27.5 x 17.7 inch	32 x 20 inch	32 x 20 inch	40 x 20 inch	40 x 20 inch
Caster Wheel	4.0 x 1.0 inch	5.0 x 1.6 inch	5.0 x 1.3 inch	5.8 x 2.0 inch	5.0 x 2.0 inch
Foot Pedal Cycles to Max.	<28	<27	<27	<45	<82
Net Weight	100 lbs.	170 lbs.	178 lbs.	275 lbs.	308 lbs.

Model PJ-770-TFD Double Scissor Lift Table



Double Scissor Lift Table	
Capacity	770 lbs
Min. Table Height	14 inch
Max Table Height	51.2 inch
Dimensions of Table	36 x 20 x 2 inch
Caster Wheel	5.0 x 1.6 inch
Foot Pedal Cycles to Max.	<53
Net Weight	231 lbs.



 www.jackco.com

 orderdesk@jackco.com

 (888) 4JACKCO



Distributor Information:

Jackco Transnational Inc. warrants all "JACKCO" branded products to the original purchaser against any manufacturing defect in material or workmanship for a period of one (1) year from the original date of purchase unless otherwise stated. If the defective product is determined to be covered under this warranty, it shall be repaired or replaced at manufacturer's discretion without charge. Provided that the product must be returned with proof of purchase and freight prepaid when returned to the manufacturer. This warranty shall not apply to damage due to accident, negligent use, lack of maintainance, abuse or applications other than the specific function the product is designed for.

No other warranties, expressed or implied, including those of merchantability or fitness for particular purpose shall be applicable to Jackco except as specifically stated herein. In no event shall Jackco be liable to any party for any special, direct, indirect, consequential, punitive damage of any nature caused by the sale or use of the equipment, tool, or product.

Note: This warranty gives the original purchaser specific legal rights which may vary from state to state.

USD \$: 3.00

Copyright © 1994-2018 by Jackco Transnational Inc.