




[www.jackco.com](http://www.jackco.com)

## **Model: 40120B - 12 Ton Jack Stands**

### **Owner's Manual & Safety Instructions**

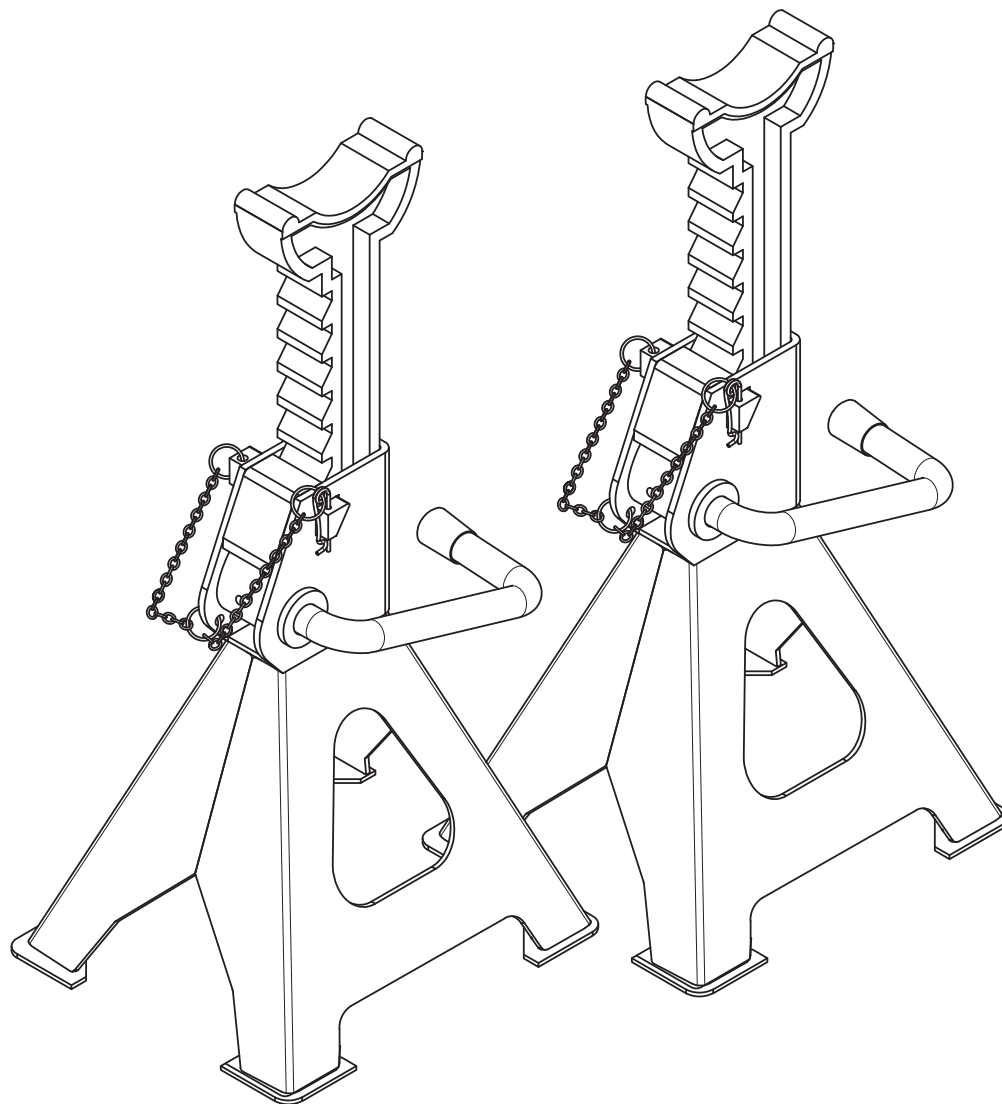

### **⚠ WARNING**

Read this material before using this product. Failure to do so can result in serious injury. **SAVE THIS MANUAL.**

Visit our website: <http://www.jackco.com>  
Email our technical support: [techsupport@jackco.com](mailto:techsupport@jackco.com)

**⚠ WARNING:** Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


## ⚠ WARNING

1. Read, understand and follow all instructions before operating this device.
2. Do not exceed rated capacity.
3. Use only on **hard, level** surfaces.
4. Center load on saddle.
5. Use as a matched pair to support one end of a vehicle only. One pair per vehicle only.
6. Jack stands are not to be used to simultaneously support both ends or one side of a vehicle.
7. No alterations shall be made to this jack stand.
8. Failure to heed these warnings may result in personal injury or property damage.
9. Before working on the car check the stability of the stands by rocking the car back and forth.

## Maintenance & Inspection

1. Visual inspection shall be made before each use of the stands, check for cracks on the post, cracked welds on the base and missing and/or damage parts. Stands that appear to be damaged in any way shall be removed from service immediately.
2. **BECAUSE OF THE POTENTIAL HAZARDS ASSOCIATED WITH THE USE OF THIS EQUIPMENT, NO REPLACEMENT PARTS ARE AVAILABLE.**

## Overview & Specifications

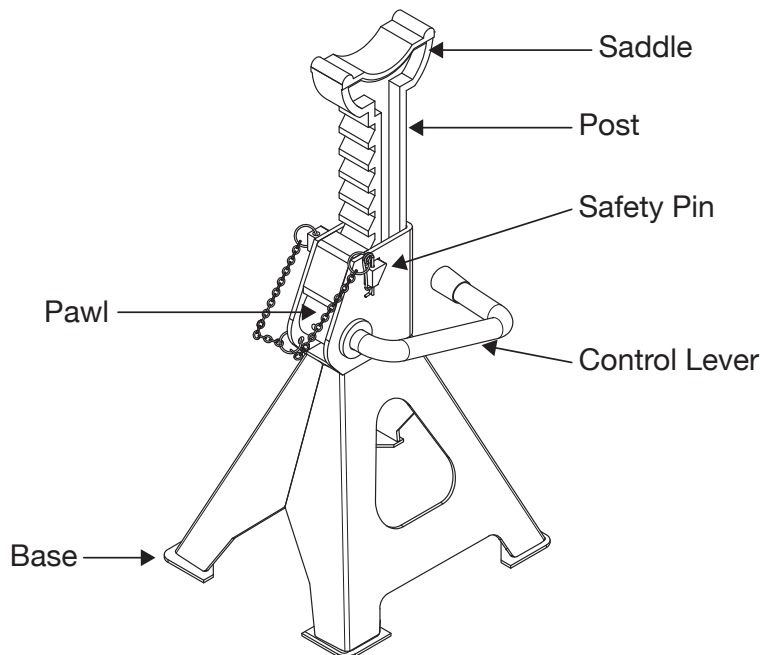

### Specifications

Lifting Capacity (Ton)	12
Max. Height (Inch)	29.9
Min. Height (Inch)	19.7
Gross Weight (lbs.)	72.7
Net Weight (lbs.)	68.8
Package Size (Inch)	13 x 14.1 x 26.6

## Operating Instructions

1. Refer to your vehicle owner's manual for proper jacking procedures lift only on areas of the vehicle as specified by vehicle's manufacturer.
2. Position stands under vehicle at points specified by vehicle manufacturer as proper load support points.
3. To adjust stands: Lift the post to desired height. Push control lever down to lock pawl in place. **MAKE SURE PAWL IS FULLY ENGAGED INTO TEETH.**
4. **Insert the safety pin.**
5. Carefully and slowly lower load onto stands.